



240W Single output power with PFC Function


HS Series

- High efficiency, long service life and high reliability
- Output protection function: Over current/short circuit
- Ultra wide operating temperature range -25°C~70°C
- Long service life electrolytic capacitor
- 100% full load ageing test
- Built-in active PFC function
- No fan, quiet
- 3 years




MODEL	HS-240P-24	HS-240P-36	HS-240P-48
OUTPUT	DC Output	24V	36
	Rated Current	10A	6.7A
	Current Range	0~10A	0~6.7A
	Ripple and Noise	150mV	150mV
	Voltage ADJ. Range	±10% of rated output voltage	
	Voltage Accuracy	±2.0%	±1.0%
	Line Regulation	±0.5%	±0.5%
	Load Regulation	±1.5%	±0.5%
	Set-up Time	<2S (230VAC input), <2S (115VAC input)	
INPUT	Hold up Time	<70ms/230VAC 15ms/115VAC	
	Voltage Range	176VAC~264VAC	
	Frequency Range	47Hz~63Hz	
	Efficiency	80%	82%
PROTECTION	Inrush Current (Typical)	<50A@230VAC <50A@115VAC Cold start	
	Over Load	105%~135% of rated output current, hiccup mode, auto recovery	
	Over power	120%~130% of rated output current, hiccup mode, auto recovery	
ENVIRONMENT	Short Circuit	Long-term mode, auto recovery	
	Operating amb. Temp. & Hum.	-25°C~70°C; 25%~90%RH	
SAFETY&EMC	Storage Temp. & Hum.	-40°C~85°C; 10%~95%RH	
	Safety Standards	Reference GB4943/EN60950, UL62368-1, TUV EN62368-1	
OTHERS	Withstand Voltage	Primary-Secondary:3.0KVAC; Primary-PG:1.5KVAC; Secondary-PG:0.5KVDC	
	MTBF (MIL-HDBK-217F)	More than 100,000Hrs (25°C, Full load)	
NOTE	Dimension (L*W*H)	215*115*50mm	
	Packing	1kg/PCS	
	Cooling method	Cooling by free air convection	
	1. All parameters NOT specially mentioned are measured at rated input, rated load and 25°C of ambient temperature.		

Block diagram of internal mechanism

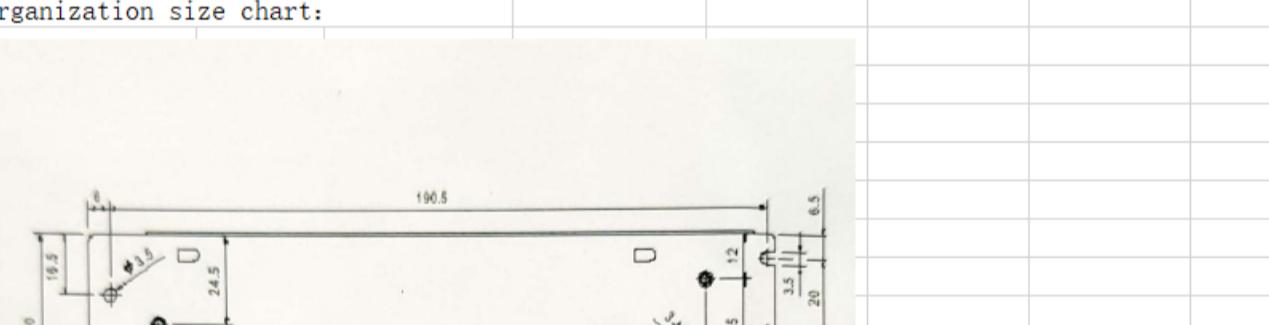

Organization size chart:

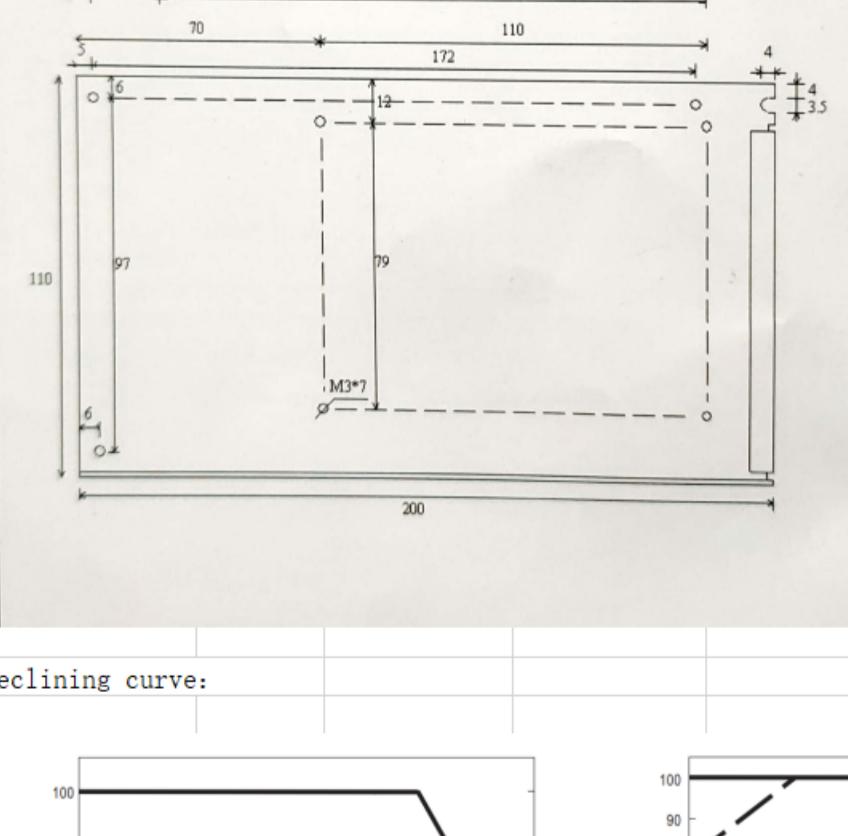

Declining curve:

