




65W Single output power supply


PS Series

- High efficiency, long service life and high reliability
- output protection function: Over current/short circuit
- ultra wide operating temperature range-10 °C ~ 60 °C
- long service life electrolytic capacitor
- 100% full load ageing test
- no fan, quiet
- 3 years



MODEL		PS-60-5	PS-65-12	PS-65-24	PS-65-36
OUTPUT	DC Output	5V	12V	24V	36V
	Rated Current	12A	5.5A	2.7A	1.8A
	CurrentRange	0~12A	0~5.5A	0~2.7A	0~1.8A
	Ripple and Noise	50mV	120mV	200mV	200mV
	Voltage ADJ. Range	±10% of rated output voltage			
	Voltage Accuracy	±2.0%	±2.0%	±2.0%	±2.0%
	Line Regulation	±1%	±1%	±1%	±1%
	Load Regulation	±1%	±1%	±1%	±1%
	Set-up Time	< 1.5S (230VAC Input), < 2.5S (115VAC Input)			
	Hold up Time	< 70ms/230VAC 15ms/115VAC			
INPUT	VoltageRange	176Vac~264Vac			
	FrequencyRange	47Hz~63Hz			
	Efficiency	72%	75%	78%	80%
	Inrush Current (Typical)	<45A@230VAC <45A@115VAC Cold start			
PROTECTION	Over Load	105%~135% of rated output current, hiccup mode, auto recovery			
	Over power	120%~130% of rated output current, hiccup mode, auto recovery			
	Short Circuit	Long-term mode, auto recovery			
ENVIRONMENT	Operating amb. Temp. & Hum.	-10°C~60°C; 25%~90%RH			
	Storage Temp. & Hum.	-40°C~85°C; 10%~95%RH			
SAFETY & EMC	Safety Standards	Reference GB4943/EN60950, UL62368-1, TUV EN62368-1			
	Withstand Voltage	input- output:3KVac; I/P-O/P:100M Ohms/500VDC 70%RH			
OTHERS	MTBF (MIL-HDBK-217F)	More than 100,000Hrs (25°C, Full load)			
	Dimension (L*W*H)	127*76*40mm			
	Packing	300g/PCS			
	Cooling method	Cooling by free air convection			
NOTE	1.All parameters NOT specially mentioned are measured at rated input, rated load and 25°C of ambient temperature.				

Block diagram of internal mechanism

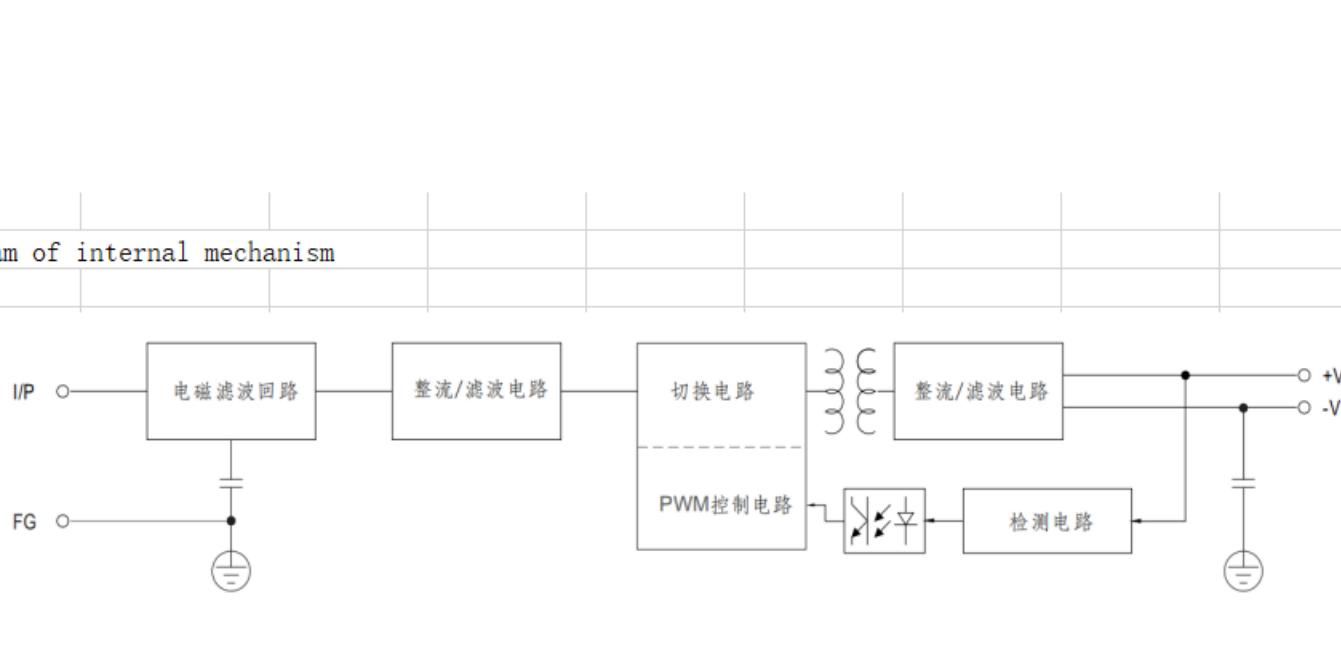

Declining curve:

