



60W Single output power supply


PS Series

- High efficiency, long service life and high reliability
- output protection function: Over current/short circuit
- ultra wide operating temperature range -10 °C ~ 60 °C
- long service life electrolytic capacitor
- 100% full load ageing test
- no fan, quiet
- 3 years



MODEL	PS-60-12	PS-60-24	PS-60-36	
OUTPUT	DC Output	12V	24V	
	Rated Current	5A	2.5A	
	CurrentRange	0~5A	0~2.5A	
	Ripple and Noise	50mV	120mV	
	Voltage ADJ. Range	±10% of rated output voltage		
	Voltage Accuracy	±2.0%	±2.0%	
	Line Regulation	±1%	±1%	
	Load Regulation	±1%	±1%	
	Set-up Time	< 1.5S (230VAC Input), < 2.5S (115VAC Input)		
	Hold up Time	< 70ms/230VAC 15ms/115VAC		
INPUT	VoltageRange	88Vac~264Vac		
	FrequencyRange	47Hz~63Hz		
	Efficiency	72%	73%	78%
	Inrush Current (Typical)	<50A@230VAC <20A@115VAC Cold start		
PROTECTION	Over Load	105%~135% of rated output current, hiccup mode, auto recovery		
	Over power	120%~130% of rated output current, hiccup mode, auto recovery		
	Short Circuit	Long-term mode, auto recovery		
ENVIRONMENT	Operating amb. Temp. & Hum.	-30°C~70°C; 25%~90%RH		
	Storage Temp. & Hum.	-40°C~85°C; 10%~95%RH		
SAFETY & EMC	Safety Standards	Reference GB4943/EN60950, UL62368-1, TUV EN62368-1		
	Withstand Voltage	input- output:3KVac; I/P-O/P:100M Ohms/500VDC 70%RH		
OTHERS	MTBF (MIL-HDBK-217F)	More than 100,000Hrs (25°C, Full load)		
	Dimension (L*W*H)	90*73*40mm		
	Packing	300g/PCS		
	Cooling method	Cooling by free air convection		
NOTE	1. All parameters NOT specially mentioned are measured at rated input, rated load and 25°C of ambient temperature.			

Block diagram of internal mechanism

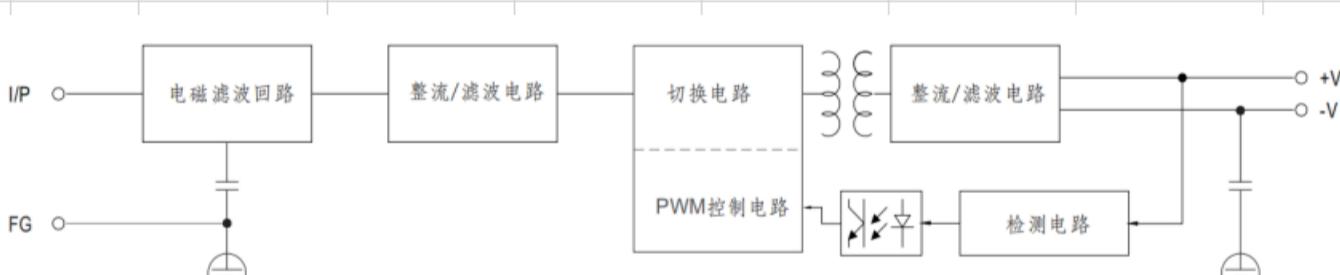

Declining curve:

