




200W Single output power supply


HS Series

- High efficiency, long service life and high reliability
- Output protection function: Over current/short circuit
- Ultra wide operating temperature range -25°C~70°C
- Long service life electrolytic capacitor
- 100% full load ageing test
- No fan, quiet
- 3 years

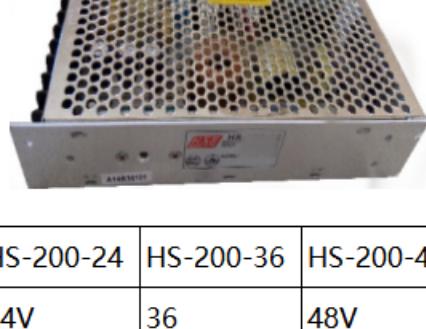


MODEL	HS-200-5	HS-200-12	HS-200-15	HS-200-24	HS-200-36	HS-200-48
OUTPUT	DC Output	5V	12V	15V	24V	36
	Rated Current	36A	16.7A	13.3A	8.3A	5.6A
	Current Range	0~36A	0~16.7A	0~13.3A	0~8.3A	0~5.6A
	Ripple and Noise	50mV	120mV	150mV	200mV	200mV
	Voltage ADJ. Range	±10% of rated output voltage				
	Voltage Accuracy	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%
	Line Regulation	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	Load Regulation	±1.5%	±0.5%	±0.5%	±0.5%	±0.5%
	Set-up Time	<2S (230VAC input), <2S (115VAC input)				
	Hold up Time	70ms/230VAC 15ms/115VAC				
INPUT	Voltage Range	88VAC~132VAC 176VAC~264VAC(Switch switching)				
	Frequency Range	47Hz~63Hz				
	Efficiency	87.0%	87.5%	88%	89.5%	89.5%
	Inrush Current (Typical)	<50A@230VAC <50A@115VAC Cold start				
PROTECTION	Over Load	105%~135% of rated output current, hiccup mode, auto recovery				
	Over power	120%~130% of rated output current, hiccup mode, auto recovery				
	Short Circuit	Long-term mode, auto recovery				
ENVIRONMENT	Operating amb. Temp. & Hum.	-25°C~70°C; 25%~90%RH				
	Storage Temp. & Hum.	-40°C~85°C; 10%~95%RH				
SAFETY & EMC	Safety Standards	Reference GB4943/EN60950, UL62368-1, TUV EN62368-1				
	Withstand Voltage	Primary-Secondary:3.0KVAC; Primary-PG:1.5KVAC; Secondary-PG:0.5KVDC				
OTHERS	MTBF (MIL-HDBK-217F)	More than 100,000Hrs (25°C, Full load)				
	Dimension (L*W*H)	200*112*50mm				
	Packing	1kg/PCS				
	Cooling method	Cooling by free air convection				
NOTE	1. All parameters NOT specially mentioned are measured at rated input, rated load and 25°C of ambient temperature.					

Block diagram of internal mechanism

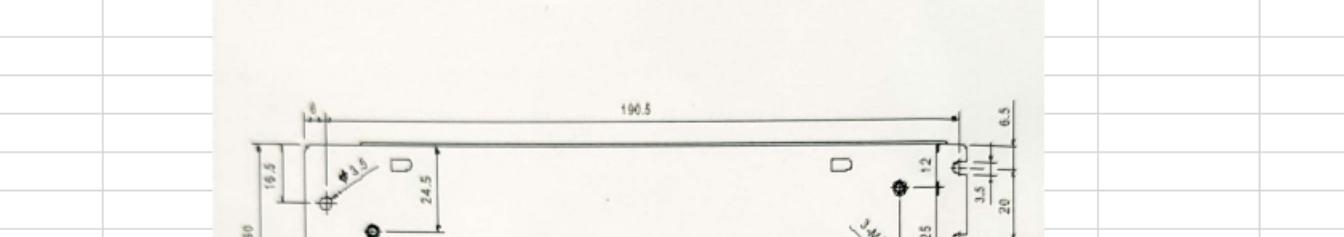

Dimensional drawing of mechanism:

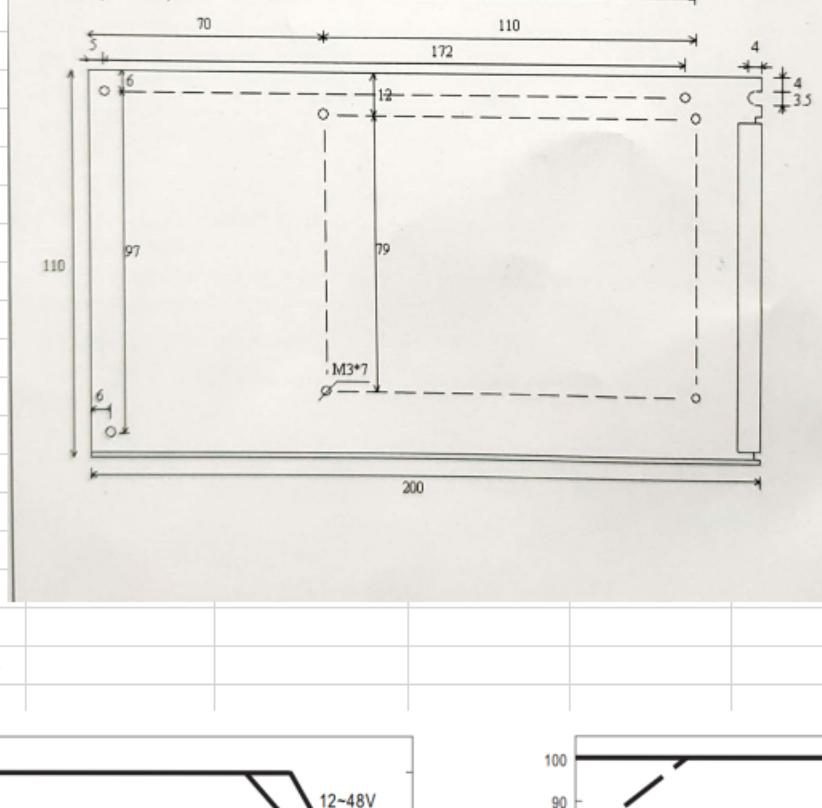

Declining curve:

