



# 200W Triple output power supply


HS Series

- High efficiency, long service life and high reliability
- Output protection function: Over current/short circuit
- Ultra wide operating temperature range -30°C~70°C
- Long service life electrolytic capacitor
- 100% full load ageing test
- No fan, quiet
- 3 years




MODEL		HS-200T-A			HS-200T-B			HS-200T-C							
OUTPUT	DC Output	5V	12V	-12V	5V	15V	-15V	5V	12V	24V					
	Rated Current	16A	8A	2A	16A	6A	2A	10A	9A	2A					
	Current Range	0.5~16A	0~8A	0~2A	0.5~16A	0~6A	0~2A	0.5~10A	0~9A	0~2A					
	Ripple and Noise	50mV	120mV	120mV	50mV	200mV	200mV	200mV	120mV	200mV					
	Voltage ADJ. Range	±10% of rated output voltage													
	Voltage Accuracy	±2.0%	±8.0%	±3.0%	±2.0%	±8.0%	±3.0%	±2.0%	±6.0%	±8.0%					
	Line Regulation	±0.5%	±1.5%	±1.5%	±0.5%	±1.5%	±1.5%	±0.5%	±2%	±2%					
	Load Regulation	±1%	±3%	±3%	±1%	±3%	±3%	±1%	±3%	±4%					
	Set-up Time	< 1S (230VAC input), < 2S (115VAC input)													
	Hold up Time	< 70ms/230VAC 15ms/115VAC													
INPUT	Voltage Range	88VAC~132VAC 176VAC~264VAC(Switch switching)													
	Frequency Range	47Hz~63Hz													
	Efficiency	73%			73%			73%							
	Inrush Current (Typical)	<60A@230VAC <60A@115VAC Cold start													
PROTECTION	Over Load	105%~135% of rated output current, hiccup mode, auto recovery													
	Over power	120%~130% of rated output current, hiccup mode, auto recovery													
	Short Circuit	Long-term mode, auto recovery													
ENVIRONMENT	Operating amb. Temp. & Hum.	-30°C~70°C; 25%~90%RH													
	Storage Temp. & Hum.	-40°C~85°C; 10%~95%RH													
SAFETY&EMC	Safety Standards	Reference GB4943/EN60950, UL62368-1, TUV EN62368-1													
	Withstand Voltage	Primary-Secondary:3.0KVAC; Primary-PG:1.5KVAC; Secondary-PG:0.5KVDC													
OTHERS	MTBF (MIL-HDBK-217F)	More than 100,000Hrs (25°C, Full load)													
	Dimension (L*W*H)	200*112*50mm													
	Packing	600g/PCS													
	Cooling method	Cooling by free air convection													
NOTE	1. All parameters NOT specially mentioned are measured at rated input, rated load and 25°C of ambient temperature.														

Block diagram of internal mechanism

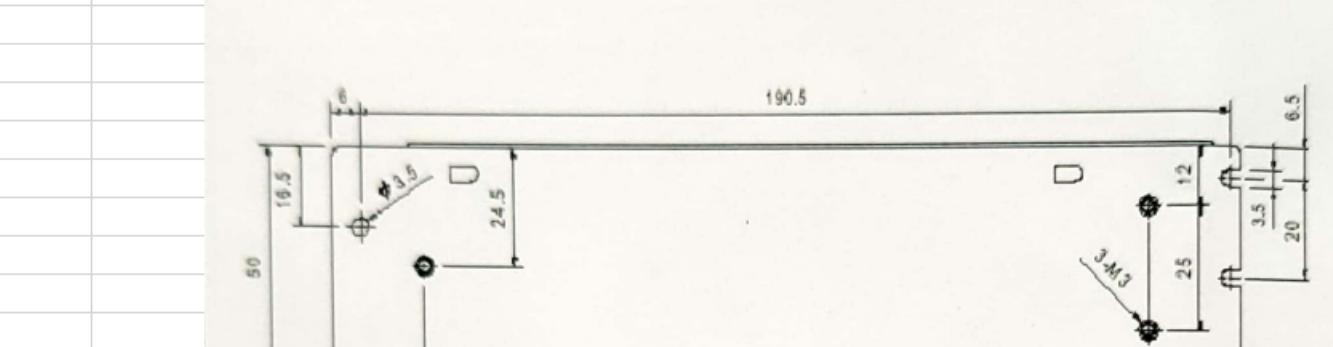

Organization size chart:

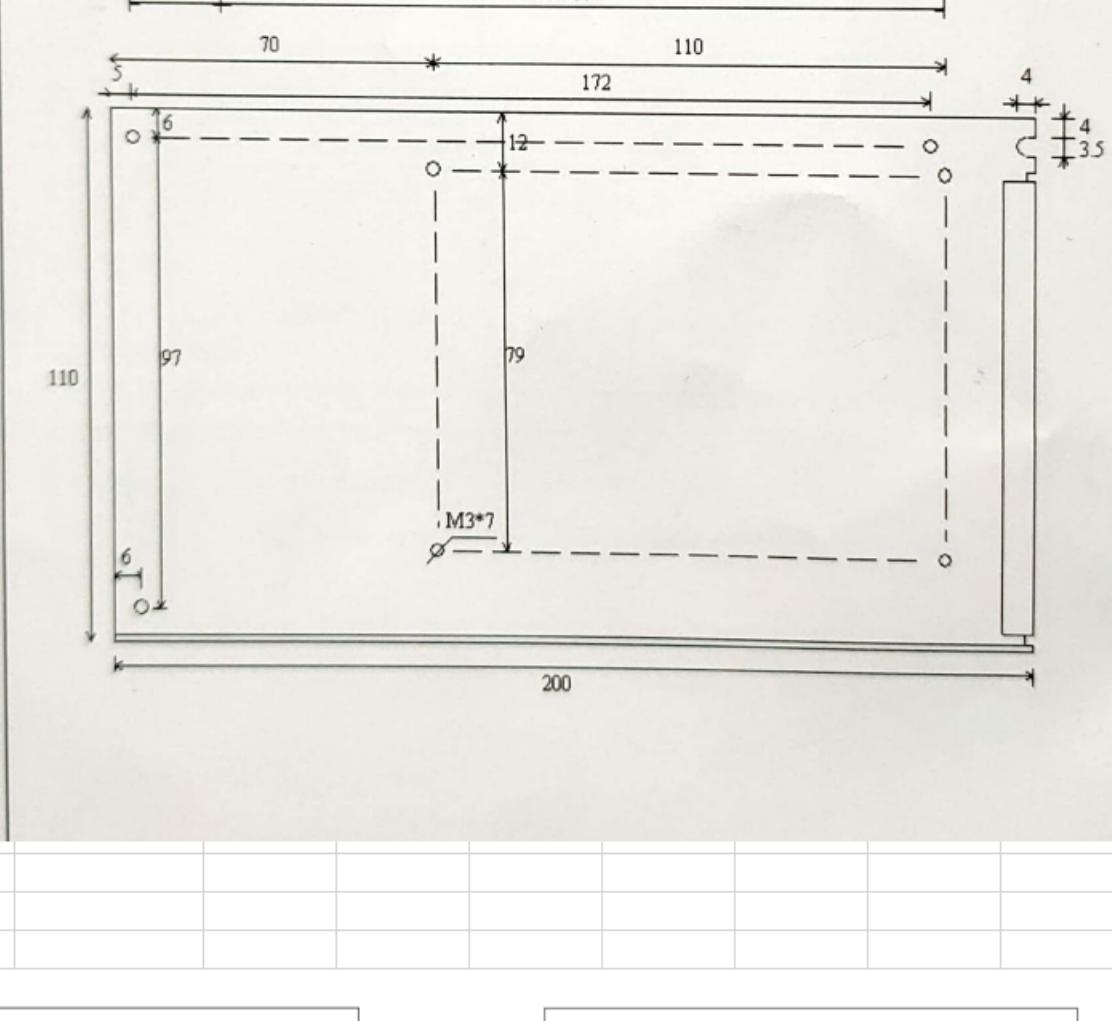

Declining curve:

