

30W Triple output power supply

HS Series

- ●High efficiency, long service life and high reliability
- ●output protection function: Over current/short circuit
- •ultra wide operating temperature range-20℃~70℃
- ●long service life electrolytic capacitor
- ●100% full load ageing test
- •no fan, quiet
- ●3 years

NOTE

temperature.

Block diagram of internal mechanism

40


20

环境温度 (℃)



								-			
MODEL		HS-30T-A				HS-30T-B			HS-30T-C		
	DC Output	5V	12V	-12V	5V	15V	-15V	5V	12V	24V	
!	Rated Current	4A	1A	0.3A	4A	0.5A	0.5A	2A	1A	0.6A	
1	CurrentRange	0.5~4A	0~1A	0~0.3A	0.5~4A	0~0.5A	0~0.5A	0.5~2A	0~1A	0~0.6A	
OUTPUT	Ripple and Noise	50mV	120mV	120mV	50mV	200mV	200mV	200mV	120mV	200mV	
	Voltage ADJ. Range	±10% of rated output voltage									
	Voltage Accuracy	±2.0%	±8.0%	±3.0%	±2.0%	±8.0%	±3.0%	±8.0%	±6.0%	±8.0%	
	Line Regulation	±0.5%	±1.5%	±1.5%	±0.5%	±1.5%	±1.5%	±0.5%	±2%	±2%	
	Load Regulation	±1%	±3%	±3%	±1%	±3%	±3%	±1%	±3%	±4%	
	Set-up Time	< 15 (230	<1S (230VAC input), <2S (115VAC input)								
	Hold up Time	< 70ms/230VAC 15ms/115VAC									
	VoltageRange	88Vac~264Vac									
COLUT	FrequencyRange	47Hz~63	47Hz~63Hz								
INPUT	Efficiency		73%			73%			73%		
	Inrush Current (Typical)	<30A@2	30VAC <2	20A@115VA	AC Cold st	tart					
	Over Load	105%~13	105%~135% of rated output current, hiccup mode, auto recovery								
PROTECTION	Over power	120%~13	30% of rate	ed output (current, hic	ccup mode	e, auto rec	overy			
	Short Circuit	Long-terr	Long-term mode, auto recovery								
STAID ON MENT	Operating amb. Temp. & - Hum.	-30°C~70	0°C; 25%~9	90%RH							
ENVIRONMENT	Storage Temp. & Hum.	-40°C~85	-40℃~85℃; 10%~95%RH								
	Safety Standards	Reference	e GB4943/	/EN60950,	UL62368	3-1, TUV E	N62368-1				
SAFETY&EMC	Withstand Voltage	Primary-S	secondary:	.3.0KVac; P	rimary-PG	6:1.5KVac; S	Secondary	-PG:0.5KV	DC		
	MTBF (MIL-HDBK-217F)	More tha	n 100,000l	Hrs (25℃, F	Full load)						
OTHERC	Dimension (L*W*H)	143*60*3	8mm								
OTHERS	Packing	400g/PCS	ŝ								
!	Cooling method	Cooling h	Cooling by free air convection								
	1 All assessment and NOT are significant and are assessment at a total insert and a local and 20°C of analysis at										

1. All parameters NOT specially mentioned are measured at rated input, rated load and 25°C of ambient

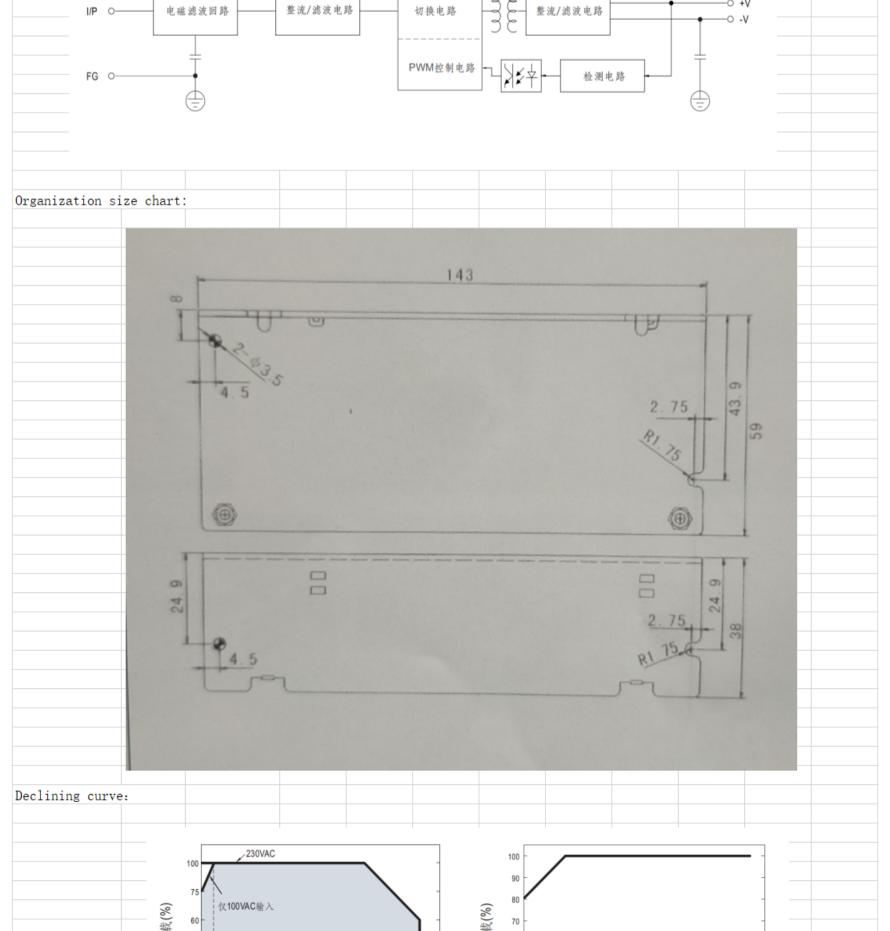

100 115 120 140 160 180 200 220 240 264

输入电压(VAC) 60Hz