



40W Quad output power supply


HS Series

- High efficiency, long service life and high reliability
- output protection function: Over current/short circuit
- ultra wide operating temperature range -30°C~70°C
- long service life electrolytic capacitor
- 100% full load ageing test
- no fan, quiet
- 3 years




MODEL	HS-40Q-A				HS-40Q-B				
OUTPUT	DC Output	5V	12V	-12V	24V	5V	15V	-15V	24V
	Rated Current	3A	0.5A	0.5A	0.5A	3A	0.5A	0.5A	0.5A
	Current Range	0.5~5A	0~0.5A	0~0.5A	0~0.5A	0.5~5A	0~0.5A	0~0.5A	0~0.5A
	Ripple and Noise	50mV	120mV	120mV	50mV	200mV	200mV	200mV	200mV
	Voltage ADJ. Range	±10% of rated output voltage							
	Voltage Accuracy	±2.0%	±8.0%	±3.0%	±8.0%	±2.0%	±3.0%	±8.0%	±8.0%
	Line Regulation	±0.5%	±1.5%	±1.5%	±1.5%	±0.5%	±1.5%	±0.5%	±2%
	Load Regulation	±1%	±3%	±3%	±3%	±1%	±3%	±1%	±4%
	Set-up Time	< 1S (230VAC input), < 2S (115VAC input input)							
	Hold up Time	70ms/230VAC 15ms/115VAC							
INPUT	Voltage Range	88Vac~264Vac							
	Frequency Range	47Hz~63Hz							
	Efficiency	73%				73%			
	Inrush Current (Typical)	<30A@230VAC <20A@115VAC Cold start							
PROTECTION	Over Load	105%~135% of rated output current, hiccup mode, auto recovery							
	Over power	120%~130% of rated output current, hiccup mode, auto recovery							
	Short Circuit	Long-term mode, auto recovery							
ENVIRONMENT	Operating amb. Temp. & Hum.	-30°C~70°C; 25%~90%RH							
	Storage Temp. & Hum.	-40°C~85°C; 10%~95%RH							
SAFETY&EMC	Safety Standards	Reference GB4943/EN60950, UL62368-1, TUV EN62368-1							
	Withstand Voltage	Primary-Secondary:3.0KVac; Primary-PG:1.5KVac; Secondary-PG:0.5KVDC							
OTHERS	MTBF (MIL-HDBK-217F)	More than 100,000Hrs (25°C, Full load)							
	Dimension (L*W*H)	143*60*38mm							
	Packing	400g/PCS							
	Cooling method	Cooling by free air convection							
NOTE	1. All parameters NOT specially mentioned are measured at rated input, rated load and 25°C of ambient temperature.								

Block diagram of internal mechanism

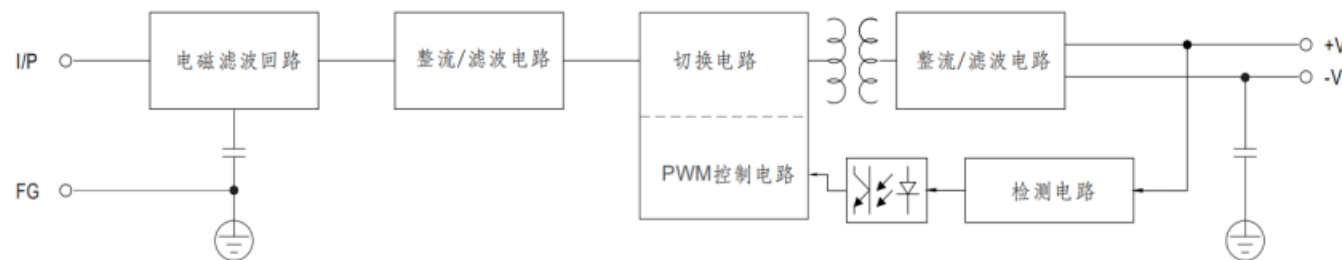

Organization size chart:

■ 机构尺寸

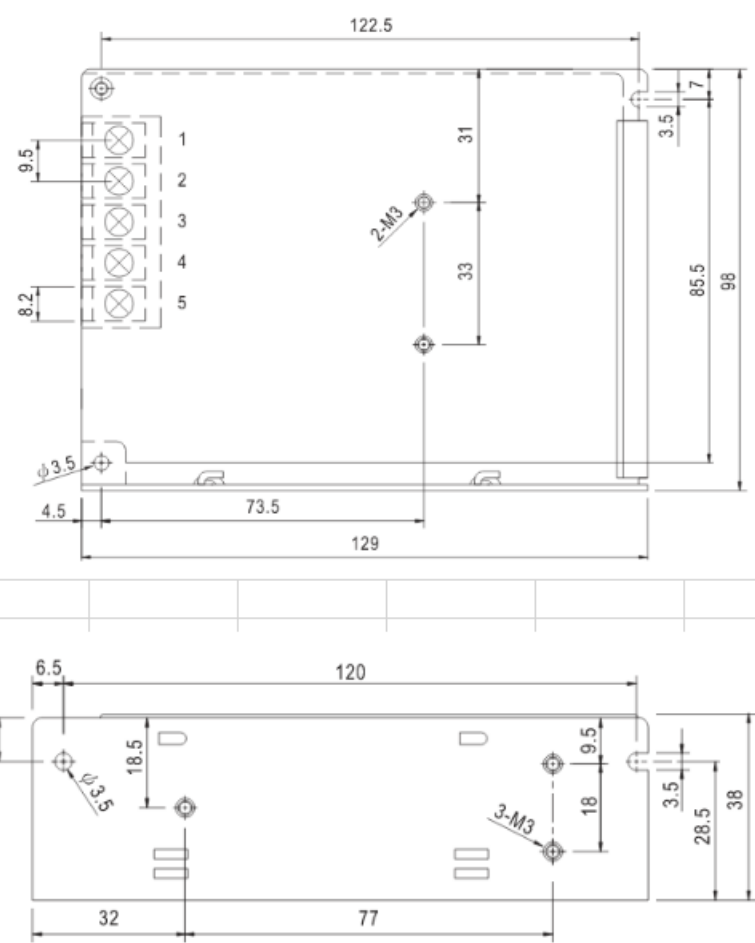

Declining curve:

